

### INVENTORY/RECOMMENDATION DETAIL

SIGN: N01 NI EXISTING SIGNAGE



PROPOSED SIGNAGE



COMMENTS

---



---



---




# FedEx Office

## BRANDING BOOK



Project Name: Saratoga Springs UT Walmart  
 Center Number: 2630  
 Project Number: 1003383

### SIGNAGE LAYOUTS N01

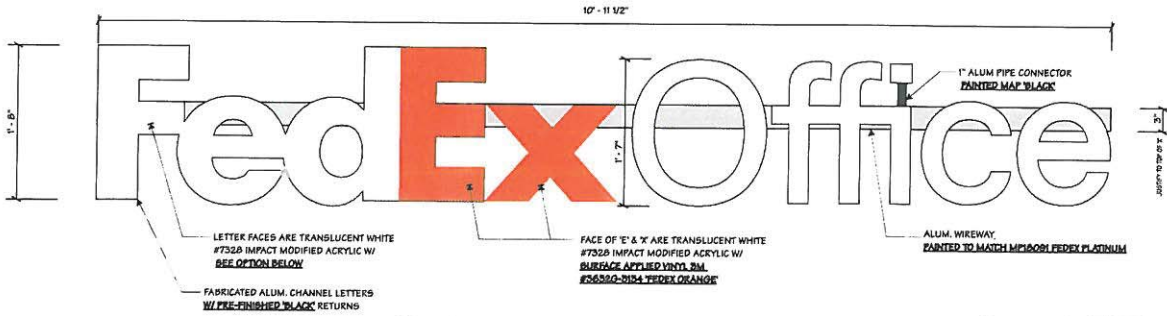

**NOTE:**  
 1.) 'FEDE' & 'FF' LETTERS TO BE BUILT AS (1) CABINET & USE (1) FACE WITHOUT A SPLICE - 'X', 'O', 'C' & 'E' ARE SEPARATE  
 2.) OVERALL AREA 18.3 SF  
 3.) ALL EXTERIOR HARDWARE MUST BE MADE OF STAINLESS STEEL.

FRONT ELEVATION  
 1/2" = 1'-0"

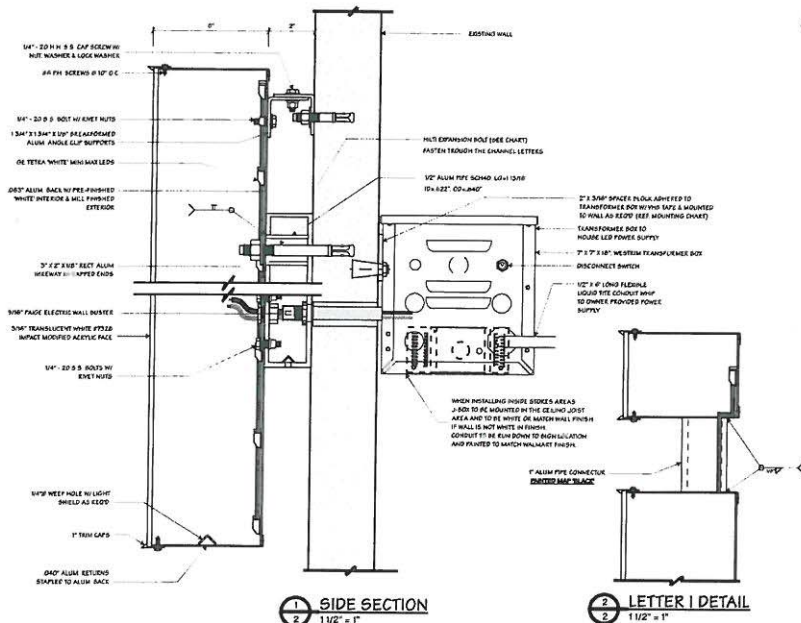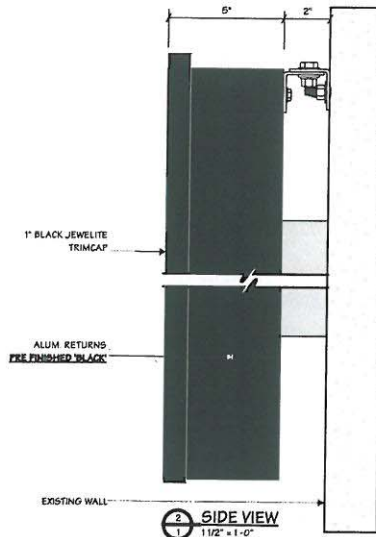

MOUNTING HARDWARE CHART	MOUNTING METHOD	
	BRACKET	CONCRETE
1/4" HILTI KWIK BOLT III®	•	•
1/4" HILTI HIT HY 200 - HAS	•	•
1/4" HILTI HIT HY TO W/ HIT SC	•	•

\* PREFERRED MOUNTING METHOD  
 VERIFY SITE WALL TYPE AND CONDITION BEFORE APPLYING THIS CHART  
 - BRACKET ANCHORS ARE 2 1/4" LONG  
 - RAGWAY ANCHORS ARE 4 1/2" LONG  
 AGI ENGINEER MUST APPROVE ANY DEVIATIONS FROM THIS CHART.

#### COMMENTS